



Heavy Tiltbed Features & Benefits



Traction Bars on Tail & Wheel Well Covers



Cushion Cylinder for Load/Unload Control



Lockable Storage Compartment in Tongue Area



Adjustable Over-Center Type Latch Assembly



Step for Easy Access on and off the Trailer Deck



Stake Pocket/Chain Slot Provide Diverse Load Securement Options

The TrailMax Advantage

Superior Quality – TrailMax trailers are built to last. From the conception in the design process and throughout the manufacturing, every step is taken to ensure durability for years of rugged use. All of our trailers are designed with the end-user in mind.

Construction – Unlike conventional I-beam or channel iron construction, TrailMax trailers are engineered with top quality tensile steel construction throughout. With steel components designed to maintain consistent tolerances to assure accuracy during the assembly process.

Components – Major brand name components are used in the manufacturing process. These components live up to the demands and performance we expect from each of our TrailMax products.

Quality Assurance – TrailMax Trailers maintain the highest quality standards in the industry. Process controls are maintained to assure consistency throughout the manufacturing process. Periodic testing is performed to assure that standards are met while constantly identifying opportunities for continual design and process improvement.



PO Box 987
Caldwell, ID 83606
1-208-454-0718
sales@trailmax.com
www.trailmax.com

Authorized Dealer:

“For The Long Haul”

1/30/2017



Tiltbed Series Heavy Tiltbed Trailers



The TrailMax Heavy Tiltbed Series offers a broad range of uses for hauling track machines and wheel type equipment. The user-friendly design provides the quickest and most convenient way for loading and unloading equipment safely. It features multiple anchor points for securing the load for transport.


At TrailMax we pride ourselves on building quality equipment trailers that provide...

Maximum Performance
Maximum Reliability, and
Maximum Return on Investment



www.TrailMax.com

5-Year Structural Warranty on all TrailMax Trailers

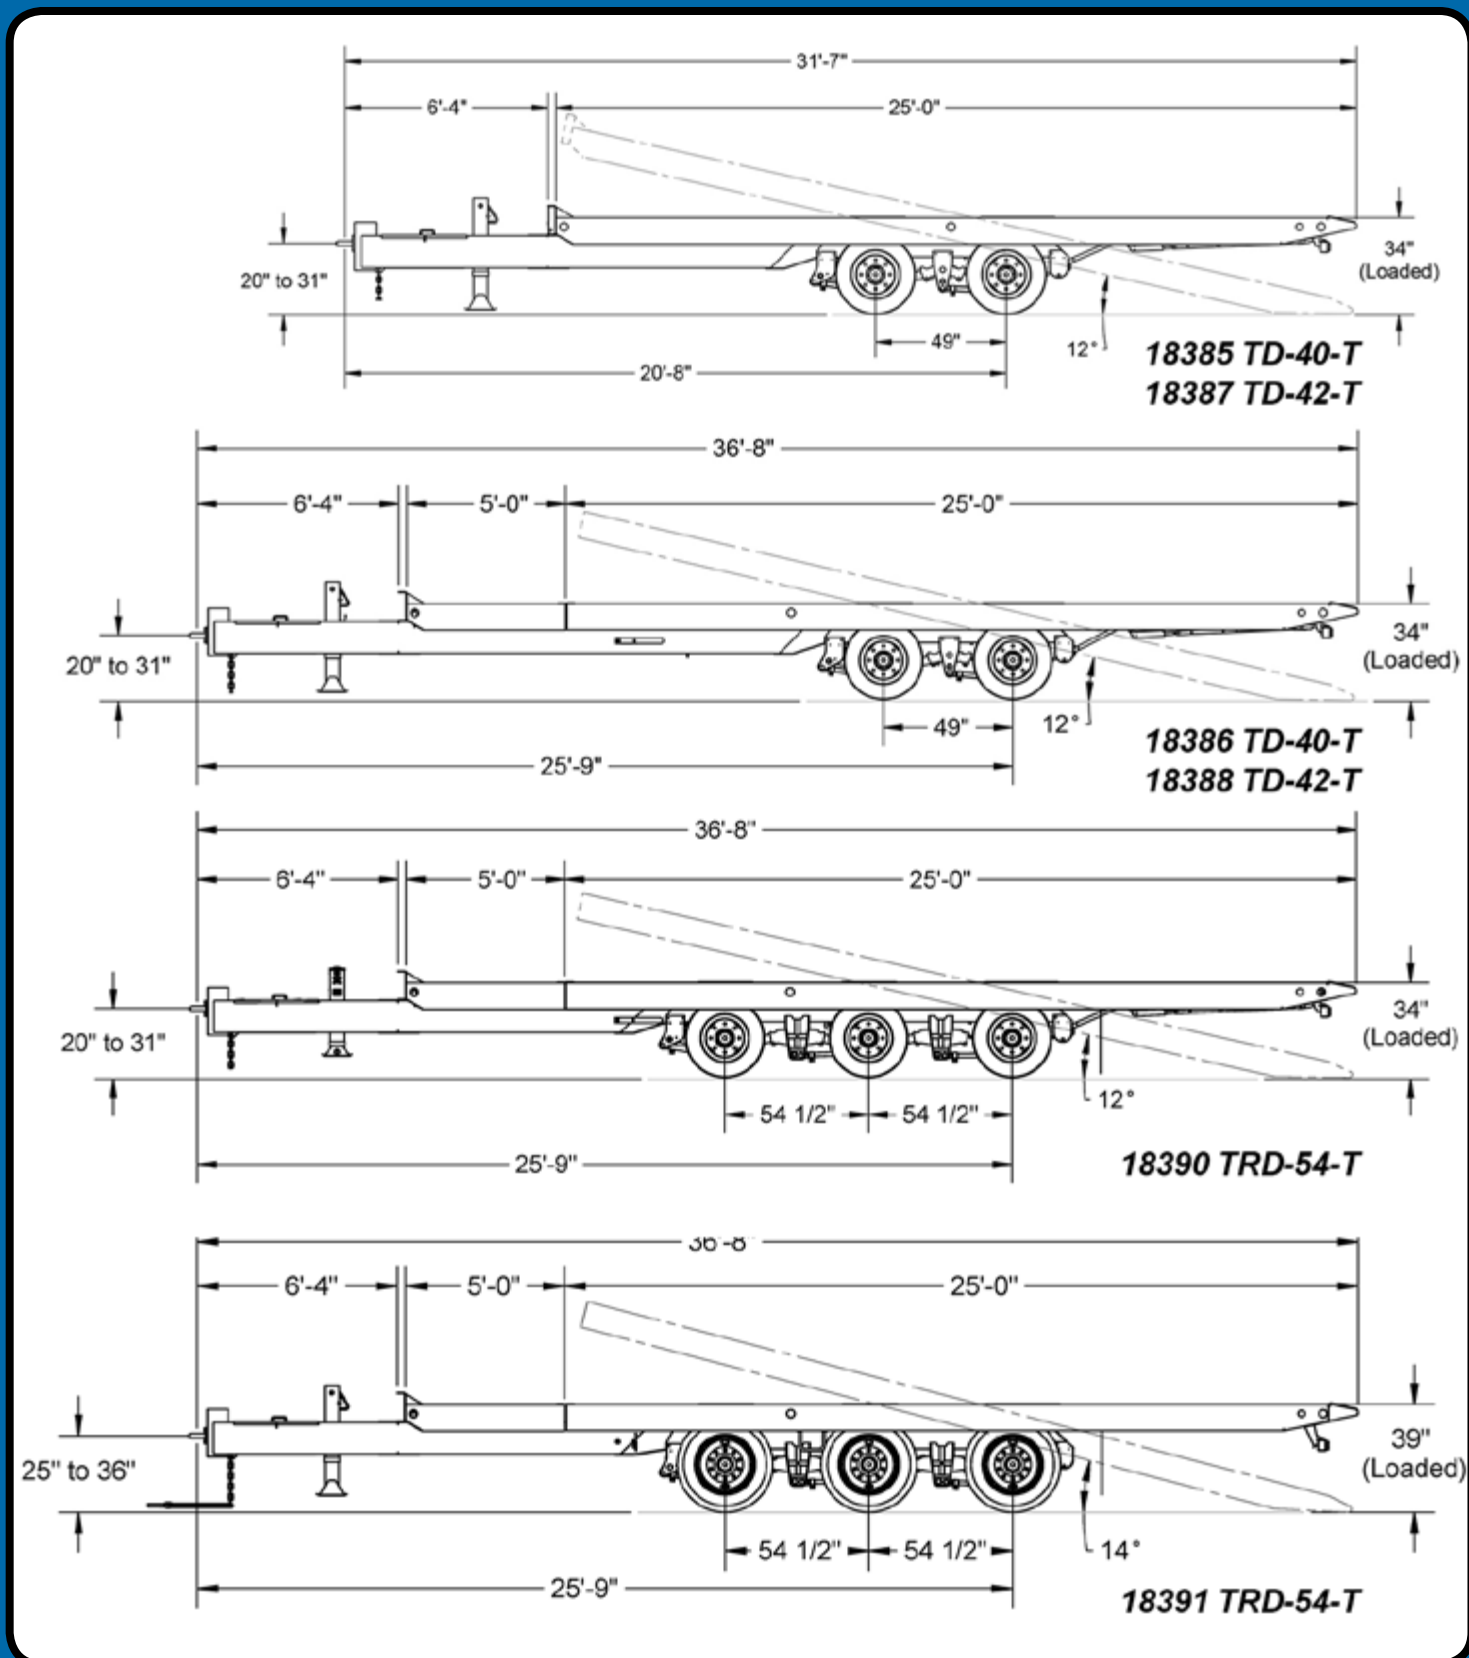


	18385 TD-40-T	18387 TD-42-T	18386 TD-40-T	18388 TD-42-T	18390 TRD-54-T	18391 TRD-54-T
GVWR (lbs.)	46,800	50,800	48,600	52,600	66,610	68,100
Capacity (Distributed) (lbs.)	37,980	41,200	37,980	41,350	53,950	54,750
Base Trailer Weight (lbs)	8,820	9,600	10,620	11,250	12,650	13,350
Frame Construction Tubular subframe with high tensile perimeter rails	✓	✓	✓	✓	✓	✓
Crossmembers 5" Tubular crossmembers on 12 and 16" centers	✓	✓	✓	✓	✓	✓
Hitch Drawbar eye, 100,000 lb. capacity adjustable	✓	✓	✓	✓	✓	✓
Landing Gear 2 speed landing gear 35,000 lb. lift capacity	✓	✓	✓	✓	✓	✓
Safety Chains 2 each 3/8" x 36" Grade 70 high test cadmium plated with slip hooks and safety latches (Note: or as noted)	✓	✓	✓	✓	1/2"	1/2"
Deck Latch Over-center type with tension adjustment and safety pin	✓	✓	✓	✓	✓	✓
Cushion Cylinder 5" x 12" with internal metered flow to cushion loading and unloading	✓	✓	✓	✓	✓	✓
Load Securement 2-way chain slot/stake pocket system	14 7 PER SIDE	14 7 PER SIDE	18 9 PER SIDE	18 9 PER SIDE	18 9 PER SIDE	18 9 PER SIDE
Storage Compartment In tongue with lockable lid	✓	✓	✓	✓	✓	✓
Axles Capacity, 5 in. round 1/2" wall thickness, 71-1/2" track and 40" spring centers	2-20K 8 on 275mm	2-23K 10 on 285.5mm	2-20K 8 on 275mm	2-23K 10 on 285.5mm	3-20K 8 on 275mm	3-23K 10 on 285.5mm
Hubs Oil bath type with Unimount Hub and drum, (Note: size as marked)	12-1/4" x 7-1/2"	16-1/2" x 7"	12-1/4" x 7-1/2"	16-1/2" x 7"	12-1/4" x 7-1/2"	16-1/2" x 7"
Brakes S-cam full air brakes with maxi spring brakes on both axles, automatic slack adjusters, equipped with 2S/2M ABS	Tandem	Tandem	Tandem	Tandem	Tri-Axle	Tri-Axle
Suspension Hutch H-9700 with axle alignment capability (Note: tandem or tri-axle)	215/75R 17.5 H	255/70R 22.5 H	215/75R 17.5 H	255/70R 22.5 H	215/75R 17.5 H	255/70R 22.5 H
Tires Radial, 16 ply rating (LRH)	✓	✓	✓	✓	✓	✓
Finish Preparation Sandblast	✓	✓	✓	✓	✓	✓
Base Coating Two-component epoxy primer sealer	✓	✓	✓	✓	✓	✓
Finish Coating Two-component urethane enamel top coat	✓	✓	✓	✓	✓	✓
Electrical Trucklite 88 series modular system with rubber isolated, LED lighting	✓	✓	✓	✓	✓	✓
Decking 2" rough surface No. 1 grade Fir with fasteners at all crossmembers	✓	✓	✓	✓	✓	✓

Capacities and Specifications can vary depending on Optional Equipment >>> Specifications subject to change without notice

Options & Accessories Available for the Heavy Tiltbed Series

- 12" Outriggers
- 48" Underbody Toolbox
- Recessed D-Rings
- Weld-On Combination Winch
- Back Up Lights
- Traction Bars
- 12,000 Winch
- Custom Paint
- Canadian Axles Specs.
- Amber Strobe/TailLight
- Oak Deck
- Spare Tire
- Hubometer
- Chock Blocks

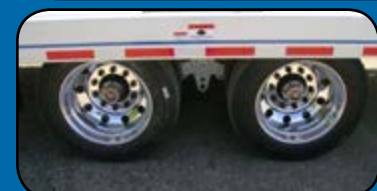

Aluminum Wheels



D-Rings



Rumber® Deck



12" Outriggers



Underbody Toolbox



Custom Paint



Traction Bars



Belt Winches