




PR Series Specifications



PR Series Heavy Power Ramp Trailer

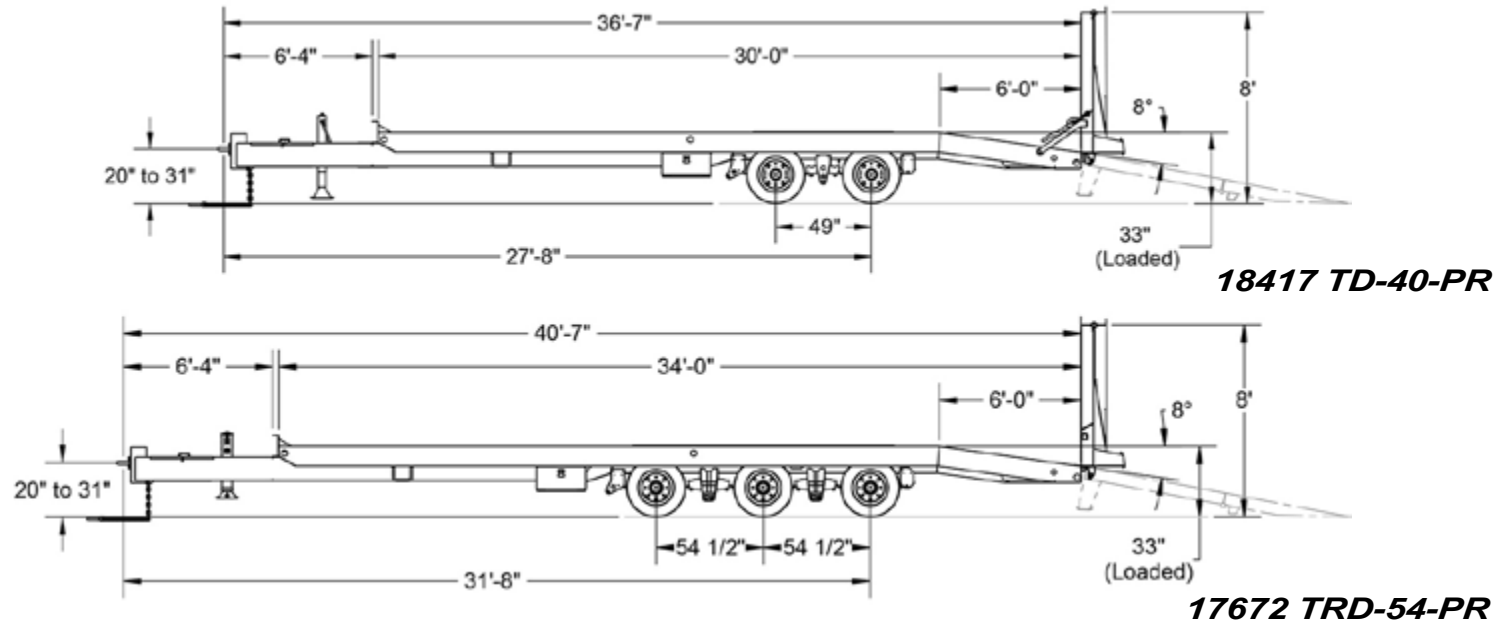

- Gross Vehicle Weight Rating
- Capacity (Distributed)
- Base Trailer Weight (Varies depending on Options)
- Loaded Deck Height
- Deck Width
- 4" Crossmembers on 16" Spacing
- Stake Pockets on 48" Centers
- Spring Suspension with Axle Alignment Capability
- 12 Volt Self Contained Hydraulic System
- 2-Speed Landing Gear with 35,000 lbs Capacity
- Fir Decking fastened at all Crossmembers
- Steel Traction Plate on Ramp area
- Storage Compartment in Tongue Area
- Axles - 20,000 lb. Capacity
- Hubs - Oil Bath, 8 Hole Hub Piloted
- Brakes - 12 1/4" x 7 1/2" Air all Axles, 2S, 2M ABS
- Spring Brakes on all Axles
- Tires - 215/75R 17.5 Load Range H
- Electrical - Truck-Lite 88 Series Harness System/LED
- Lights - Rubber mounted LED with mid ship Turn/Marker
- Finish- Sandblast with two component epoxy primer and top coat. Std. color White

	18417 TD-40-PR	17672 TRD-54-PR
Gross Vehicle Weight Rating	48,820 lbs.	66,980 lbs.
Capacity (Distributed)	37,580 lbs.	52,060 lbs.
Base Trailer Weight (Varies depending on Options)	11,240 lbs.	14,920 lbs.
Loaded Deck Height	33"	33"
Deck Width	102"	102"
4" Crossmembers on 16" Spacing	Std	Std
Stake Pockets on 48" Centers	Std	Std
Spring Suspension with Axle Alignment Capability	Std	Std
12 Volt Self Contained Hydraulic System	Std	Std
2-Speed Landing Gear with 35,000 lbs Capacity	Std	Std
Fir Decking fastened at all Crossmembers	Std	Std
Steel Traction Plate on Ramp area	Std	Std
Storage Compartment in Tongue Area	Std	Std
Axles - 20,000 lb. Capacity	2 each	3 each
Hubs - Oil Bath, 8 Hole Hub Piloted	Std	Std
Brakes - 12 1/4" x 7 1/2" Air all Axles, 2S, 2M ABS	Std	Std
Spring Brakes on all Axles	Std	Std
Tires - 215/75R 17.5 Load Range H	Std	Std
Electrical - Truck-Lite 88 Series Harness System/LED	Std	Std
Lights - Rubber mounted LED with mid ship Turn/Marker	Std	Std
Finish- Sandblast with two component epoxy primer and top coat. Std. color White	Std	Std

Capacities and Specifications can vary depending on Optional Equipment >>> Specifications subject to change without notice

Authorized Dealer:



PO Box 987
Caldwell, ID 83606
1-208-454-0718
sales@trailmax.com
www.trailmax.com

"For The Long Haul"

1/9/2017



The TrailMax **PR Series** offers a broad range of uses. It features a low ramp angle of 8° for loading low clearance and gradeability challenged equipment. The ramp is lowered and raised hydraulically and provides safe loading with one person operation. Available in many different configurations and capacities.

TrailMax - we pride ourselves on building quality equipment trailers that provide...

Maximum Performance
Maximum Reliability, and
Maximum Return on Investment



www.TrailMax.com



5-Year Structural Warranty on all TrailMax Trailers



The ramp stores in the vertical position and locked into position with an adjustable latch mechanism on each side to keep ramp secure, tight and rattle free during transport.



The PR Series ramp comes standard with a steel mesh surface that provides excellent traction while minimizing wind drag during transport.



The PR Series features a Bi-Fold design ramp that extends out to an 8° load angle hydraulically with the touch of a lever.



When in the load position, it provides a zero clearance approach transition from ground surface to ramp.

Standard Features



8° degree Load Angle



Self Contained 12 Volt Power Unit



Stake Pocket/Chain Slots



Storage Compartment

Options & Accessories



48" Underbody Tool Box



Rubber Decking



Custom Paint



Recessed D-Rings



12" Outriggers



Aluminum Wheels

TrailMax Alternative Ramp Configuration



Standard FBR Ramps

Our standard ramps offer a 14° load angle, with ramps adjustable for various track widths.

The TrailMax Advantage

Superior Quality – TrailMax trailers are built to last. From the conception in the design process and throughout the manufacturing, every step is taken to ensure durability for years of rugged use. All of our trailers are designed with the end-user in mind.

Construction – Unlike conventional I-beam or channel iron construction, TrailMax trailers are engineered with top quality tensile steel construction throughout. With steel components designed to maintain consistent tolerances to assure accuracy during the assembly process.

Components – Major brand name components are used in the manufacturing process. Components that live up to the demands and performance we expect from each of our TrailMax products.

Quality Assurance – TrailMax Trailers maintains the highest quality standards in the industry. Process controls are maintained to assure consistency throughout the manufacturing process. Periodic testing is performed to assure that standards are met while constantly identifying opportunity for continual design and process improvement.

Options & Accessories Available for Heavy PR

4S 2M ABS
D-Rings
48" Underbody Toolbox
Weld-On Combination Winch
Mid Ship Turn Signal

Chock Blokes
Custom Paint
Rubber Deck
Canadian Axles Specs.
Amber Strobe/TailLight

Back Up Lights
Spare Tire
Hubometer
Aluminum Wheels

Heavy PR Series