

The TrailMax *Utility Tilt* offers a broad range of uses. It comes available with and without the 4' stationary deck in front of the tiltbed. Common uses include skid steers, mini excavators, landscape, farm and other small equipment uses. Easy user friendly design makes for ease of loading and unloading safely and efficiently.

At TrailMax we pride ourselves on building quality equipment trailers that provide...

Maximum Performance
Maximum Reliability, and
Maximum Return on Investment



www.TrailMax.com




5-Year Structural Warranty on all TrailMax Trailers

	15749 T-12-UT	15750 T-12-UT	15703 T-16-UT	15753 T-16-UT	19505 T-16-UT
GVWR	14,000 lbs.	15,680 lbs.	18,400 lbs.	18,400 lbs.	18,400 lbs.
Capacity (Distributed)	11,000 lbs.	12,040 lbs.	14,780 lbs.	14,260 lbs.	14,000 lbs.
Base Trailer Weight	3,000 lbs.	3,640 lbs.	3,620 lbs.	4,140 lbs.	4,300 lbs.
Safety Chains: 5/16" x 30" Grade 70 w/ hooks	X	X			
Safety Chains: 3/8" x 36" Grade 70 w/ hooks			X	X	X
Deck Latch: Over-center type with tension adjustment and safety pin	X	X	X	X	X
Cushion Cylinder: For load & unload control	3"x8"	3"x8"	3"x12"	3"x12"	3"x12"
Load Securement: 8 ea (4 per side) D-Rings and Stake Pockets	5/8"		1"		
Load Securement: 12 ea (6 per side) D-Rings and Stake Pockets		5/8"		1"	
Load Securement: 14 ea (7 per side) D-Rings and Stake Pockets					1"
Lockable storage compartment in tongue	X	X	X	X	X
Axles: 2 each rubber torsion axles, capacity as noted	7,000 lb.	7,000 lb.	8,000 lb.	8,000 lb.	8,000 lb.
Hubs: Ultralube bearings, 8 on 6.5 bolt circle with 9/16" studs	X	X			
Hubs: Oil bath, 8 on 6.5 bolt circle with 5/8" studs			X	X	X
Brakes: Electric brakes both axles with 12 volt breakaway system	X	X	X	X	X
Wheels: 8 hole disc type 6.5 bolt circle	16x6	16x6	17.5x7.75	17.5x7.75	17.5x6.75
Tires: 235/80R 16 radial load range E	X	X			
Tires: 215/75R 17.5 radial load range H			X	X	X
Coating: Sandblast	X	X	X	X	X
Electrical: Sealed Harness System with rubber mounted sealed lighting	X	X	X	X	X
Decking: 2" rough surface No. 1 grade Fir w/ fasteners at all crossmembers	X	X	X	X	X

Capacities and Specifications can vary depending on Optional Equipment >>> Specifications subject to change without notice

Authorized Dealer:

Utility Tilt Trailers

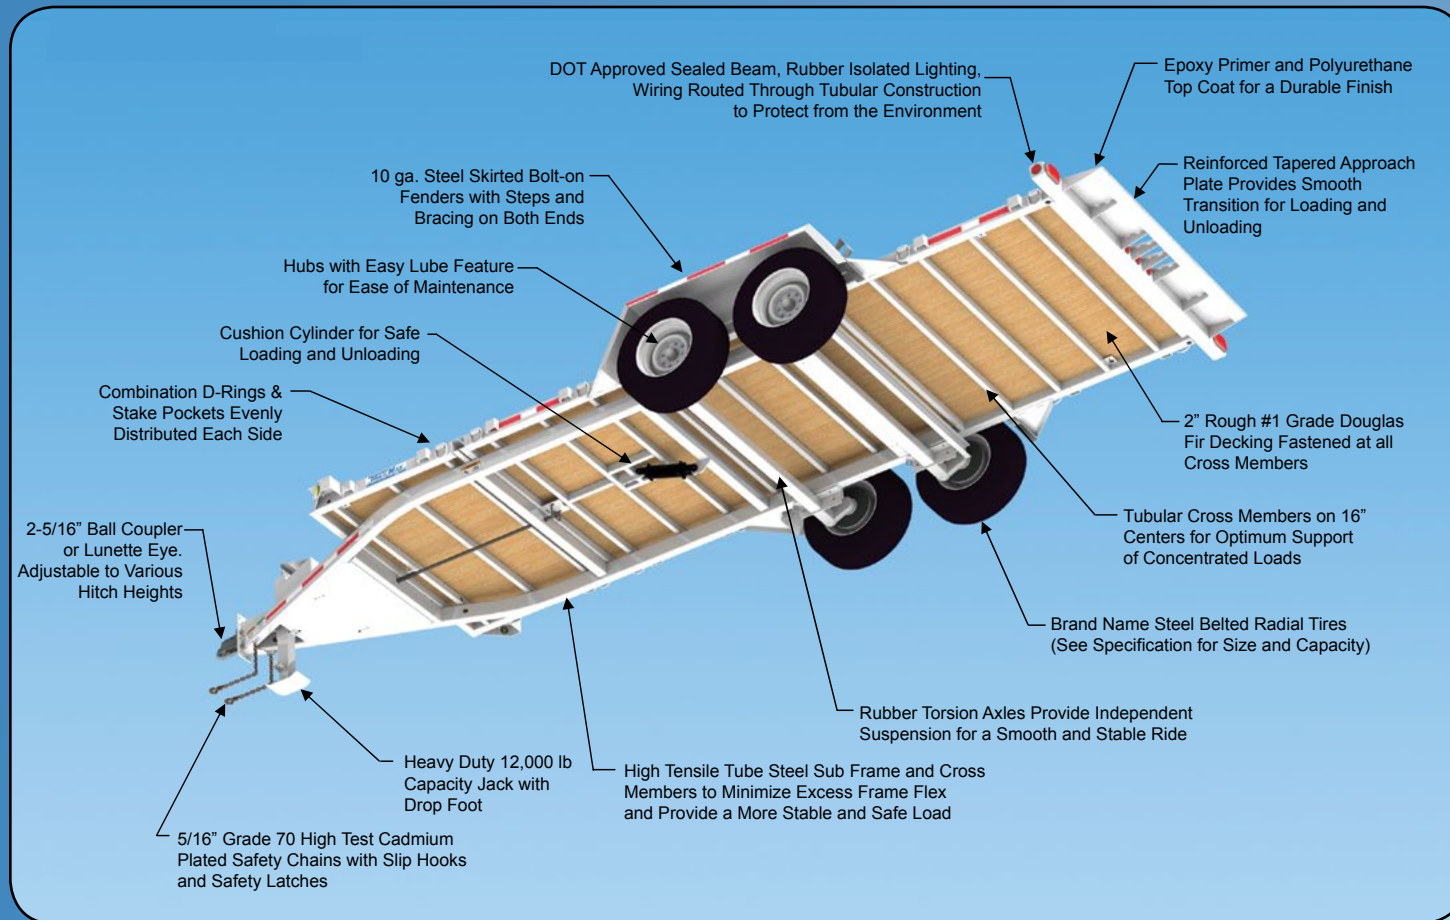

Features & Benefits



Combination D-rings & Stake Pockets



1-Piece Continuous Sub Frame



Combination Lockable & Open Storage Compartments



82 1/2" Deck Width Full Length of Tiltbed




Bolt-On Coupler & Jack Assembly



Heavy Duty Bolt-on Fenders

Utility Tilt

Options & Accessories

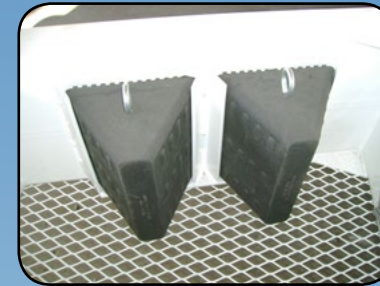

Chock Blocks



Custom Paint



Hubometer



Extra D Rings



Lunette Eye



Rumber[®] Deck

The TrailMax Advantage

Superior Quality – TrailMax trailers are built to last. From the conception in the design process and throughout the manufacturing, every step is taken to ensure durability for years of rugged use. All of our trailers are designed with the end-user in mind.

Construction – Unlike conventional I-beam or channel iron construction, TrailMax trailers are engineered with top quality tensile steel construction throughout. With steel components designed to maintain consistent tolerances to assure accuracy during the assembly process.

Components – Major brand name components are used in the manufacturing process. These components live up to the demands and performance we expect from each of our TrailMax products.

Quality Assurance – TrailMax Trailers maintain the highest quality standards in the industry. Process controls are maintained to assure consistency throughout the manufacturing process. Periodic testing is performed to assure that standards are met while constantly identifying opportunities for continual design and process improvement.

Options & Accessories Available for Utility Tilt

Lunette Eye
D-Rings

Extra Stake Pockets
Weld-On Combination Winch

Oak Deck
Rumber[®] Deck
Surge Brakes
Custom Paint

Spare Tire
Spare Tire Carrier
Hubometer
Crossmembers on 12" Centers